



H Series Outdoor

Rental LED Display

P2.6,P2.9,P3.9,P4.8



Great Cabinet Design



Light Weight



Seamless Connection



Excellent Performance



Curve Capabilities



Easy Repair



1,920Hz ~ 3,840Hz




Various Shapes

Product Description

Great Cabinet Design


To meet the requirements of customers in different application scenarios, 2 cabinet sizes are available.

One of the cabinet size is 500mm x 500mm, and another one is 500mm x 1000mm, which makes installation flexible during the event.

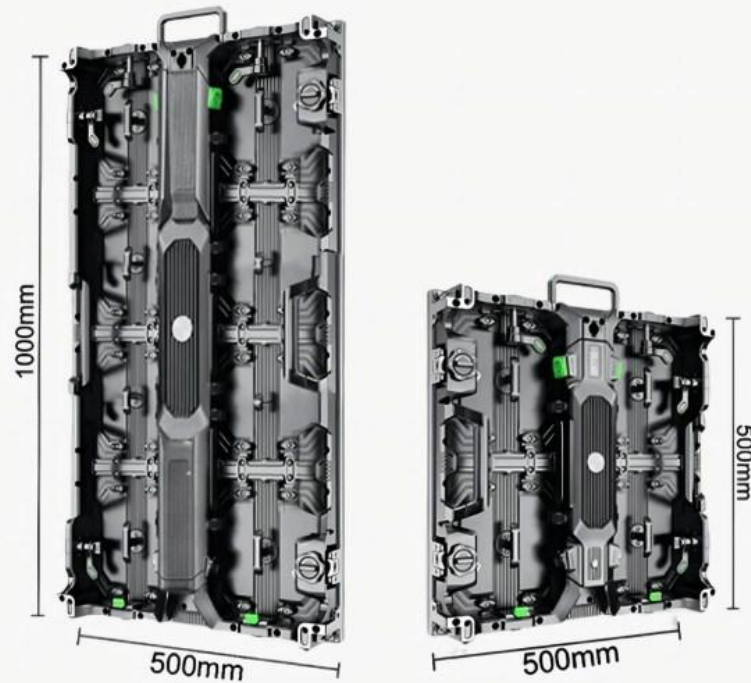

Light Weight

As the cabinet uses die-cast aluminum material, the weight of the panel is only 9 kgs, and it has great heat dissipation.

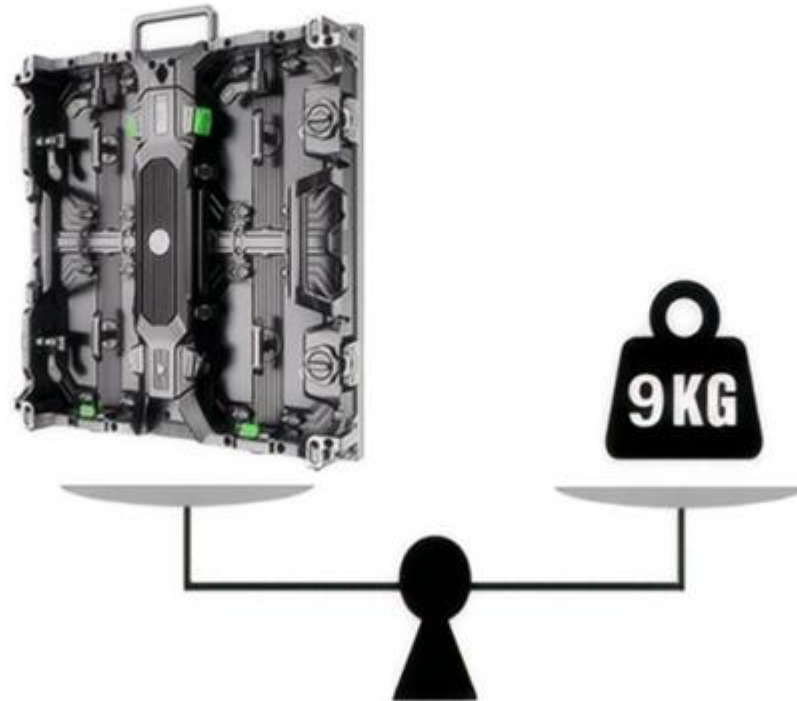


Removable power supply

The power supply box is easy to disassemble, you only need to open the button next to the box, and you can easily replace it.



Curved Design

The lock is very secure and strong. It can be designed to be curved to form a curved screen from -15° (convex) to $+15^{\circ}$ (concave).

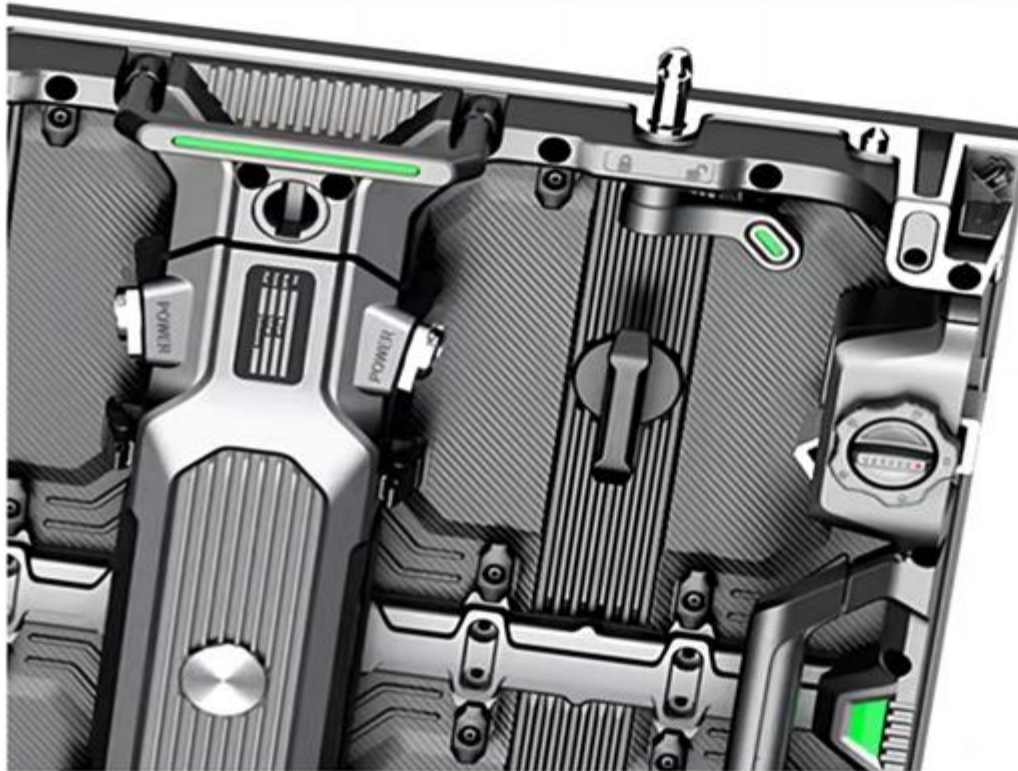

SERIE H OUTDOOR	P. 2,6	P. 2,9	P. 3,9	P. 4,8
<i>Passo</i>	2,604 mm	2,976 mm	3,91 mm	4,81 mm
<i>Modello del led</i>	SMD 1415	SMD 1415/1921	SMD 1921	SMD 1921
<i>Risoluzione modulo (pixel)</i>	96 x 96	84 x 84	64 x 64	52 x 52
<i>Driving mode</i>	1/24 scan	1/21 scan	1/16 scan	1/13 scan
<i>Pixel per modulo</i>	9,216	7,056	4,096	2,704
<i>Dimensione modulo (mm)</i>	250 x 250	250 x 250	250 x 250	250 x 250
<i>Dimensione Cabinet (mm)</i>	500 x 500/1000	500 x 500/1000	500 x 500/1000	500 x 500/1000
<i>Risoluzione Cabinet (pixel)</i>	192 x 192/384	168 x 168/336	128 x 128/256	104 x 104/208
<i>Pixel al mq</i>	147,456	112,896	65,536	43,264
<i>Distanza minima di visualizzazione</i>	≥ 2,6 m	≥ 2,9 m	≥ 3,9 m	≥ 4,8 m
<i>Luminosità</i>	5,000 Nits	5,000 Nits	5,000 Nits	5,000 Nits
<i>Protezione IP</i>	IP 65	IP 65	IP 65	IP 65
<i>Refresh rate (Hz)</i>	da 1,920 a 7,680	da 1,920 a 7,680	da 1,920 a 7,680	da 1,920 a 7,680
<i>Scala di grigi</i>	da 12 a 16 bits	da 12 a 16 bits	da 12 a 16 bits	da 12 a 16 bits
<i>Angolo visivo</i>	160°/160°	160°/160°	160°/160°	160°/160°
<i>Consumo massimo</i>	800 W/mq	800 W/mq	800 W/mq	800 W/mq
<i>Consumo medio</i>	240 W/mq	240 W/mq	240 W/mq	240 W/mq
<i>Voltaggio</i>	AC110V/AC220V	AC110V/AC220V	AC110V/AC220V	AC110V/AC220V
<i>Range operativo temperatura</i>	-10°C / 90°C	-10°C / 90°C	-10°C / 90°C	-10°C / 90°C
<i>Range operativo umidità</i>	10% / 90%	10% / 90%	10% / 90%	10% / 90%
<i>Materiale del cabinet</i>	Alluminio	Alluminio	Alluminio	Alluminio
<i>Peso cabinet 500 x 500</i>	7,5 Kg	7,5 Kg	7,5 Kg	7,5 Kg
<i>Peso cabinet 500 x 1,000</i>	14 Kg	14 Kg	14 Kg	14 Kg