




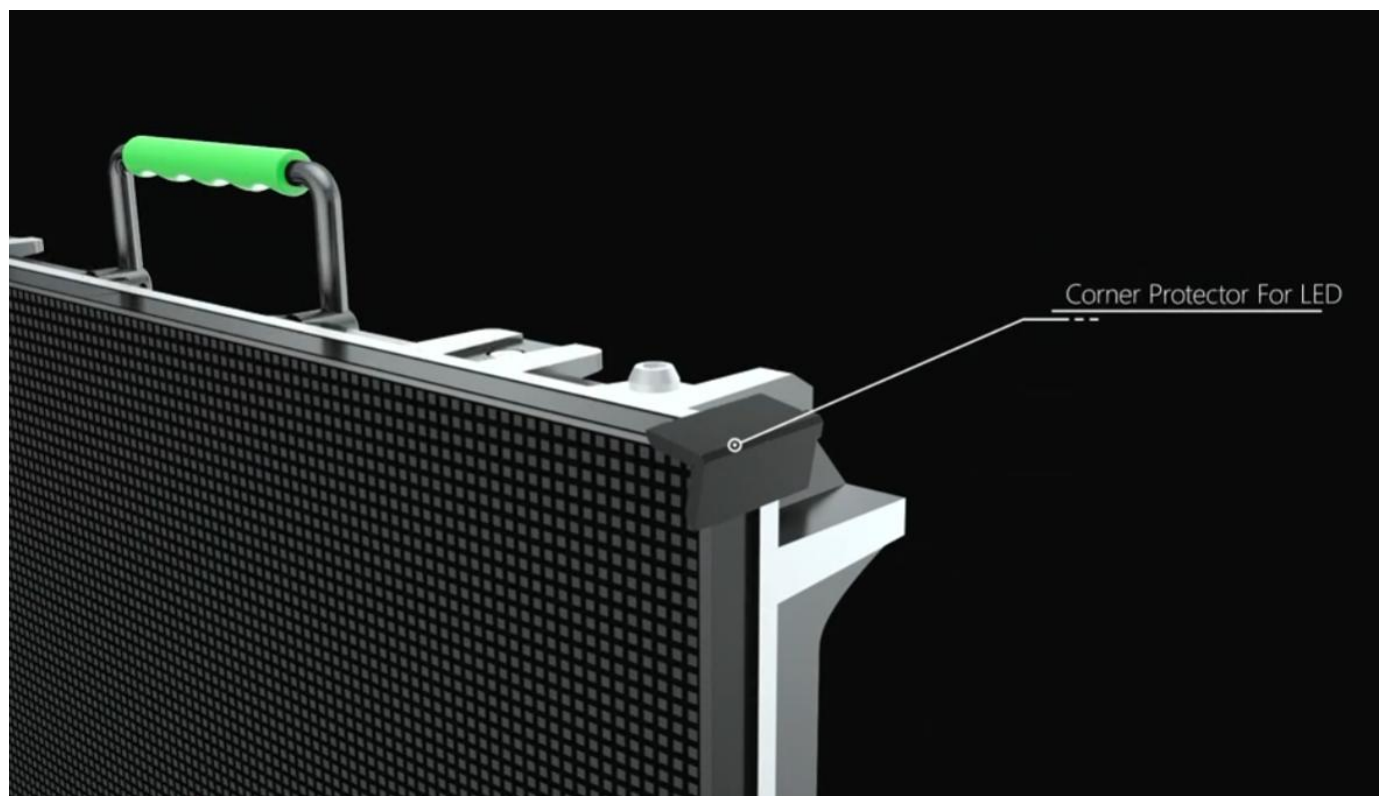




U Series



Outdoor LED display for Rental



P2.6,P2.9,P3.9,P4.8

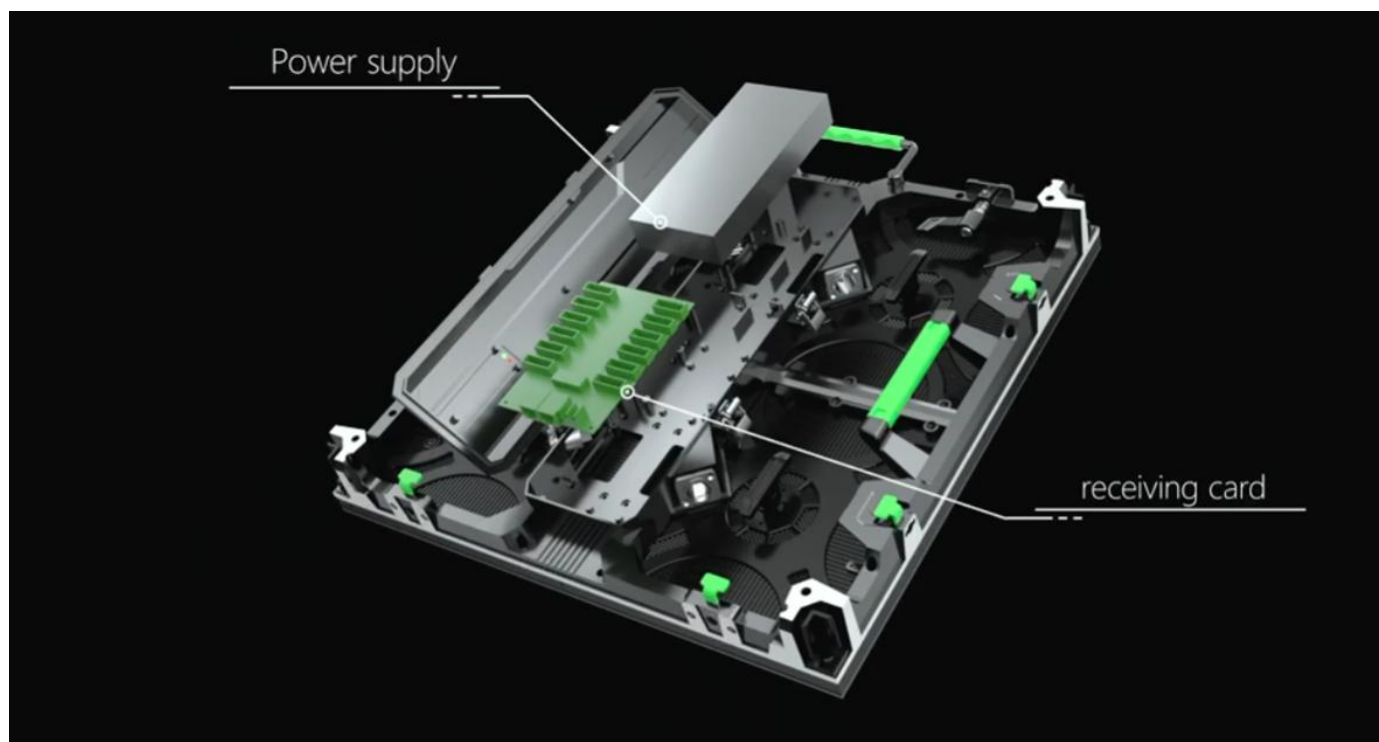


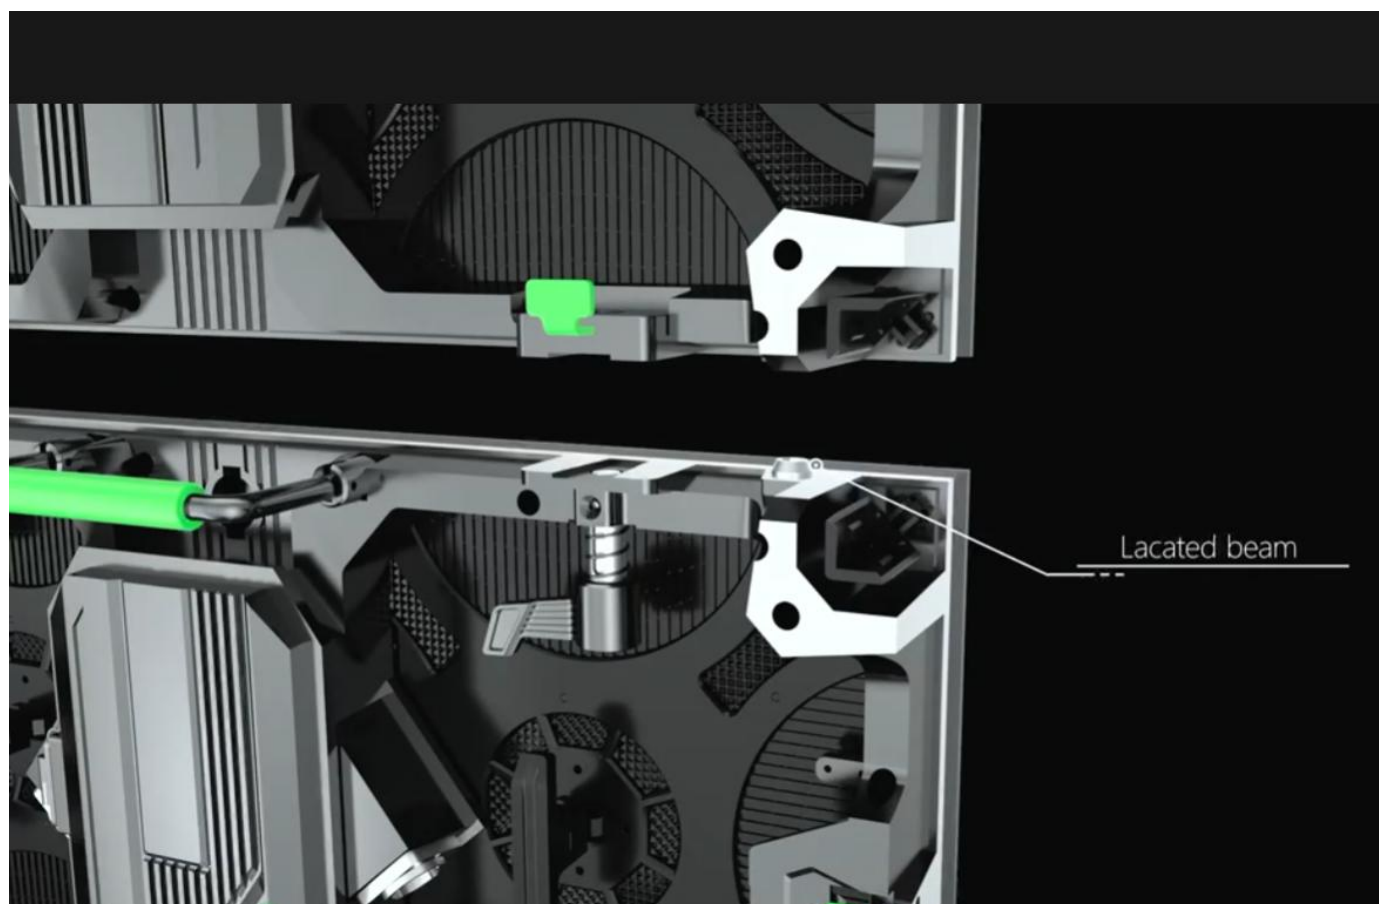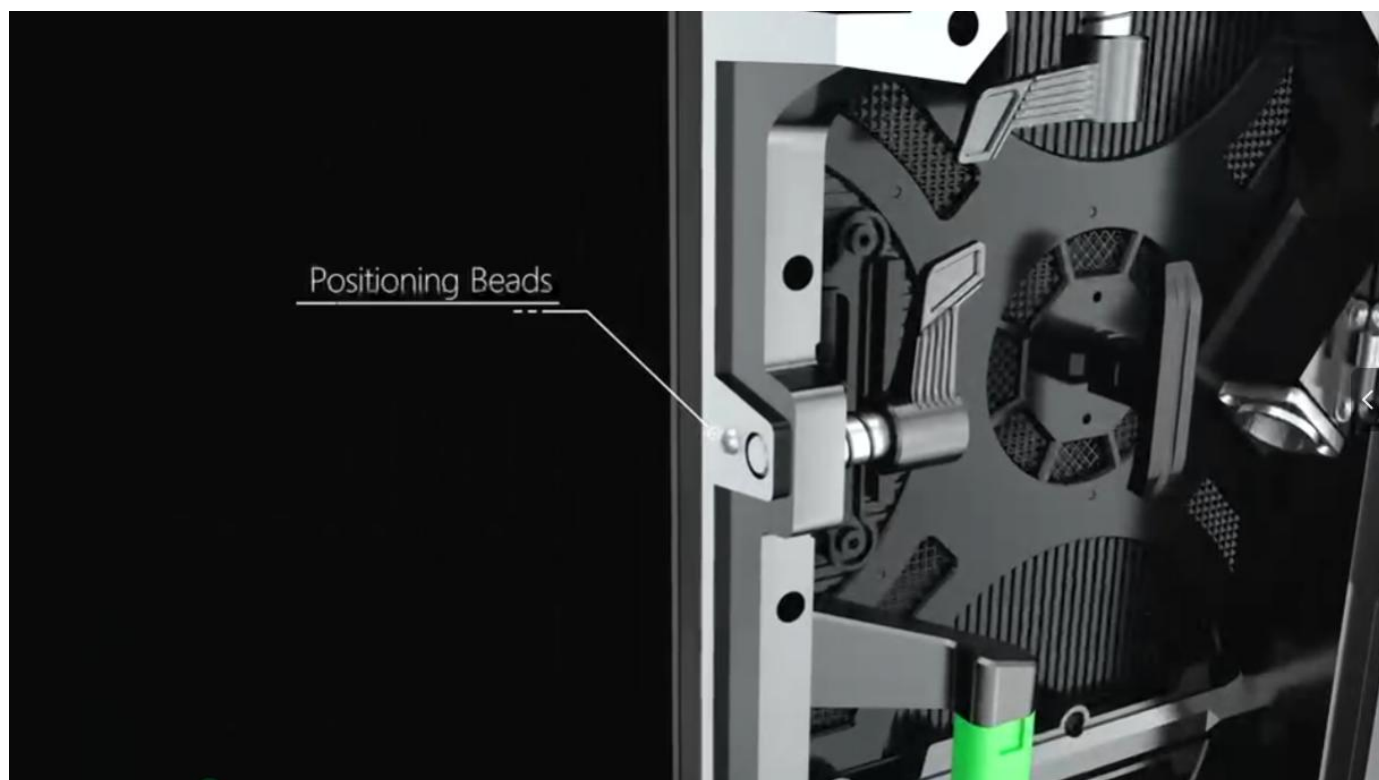


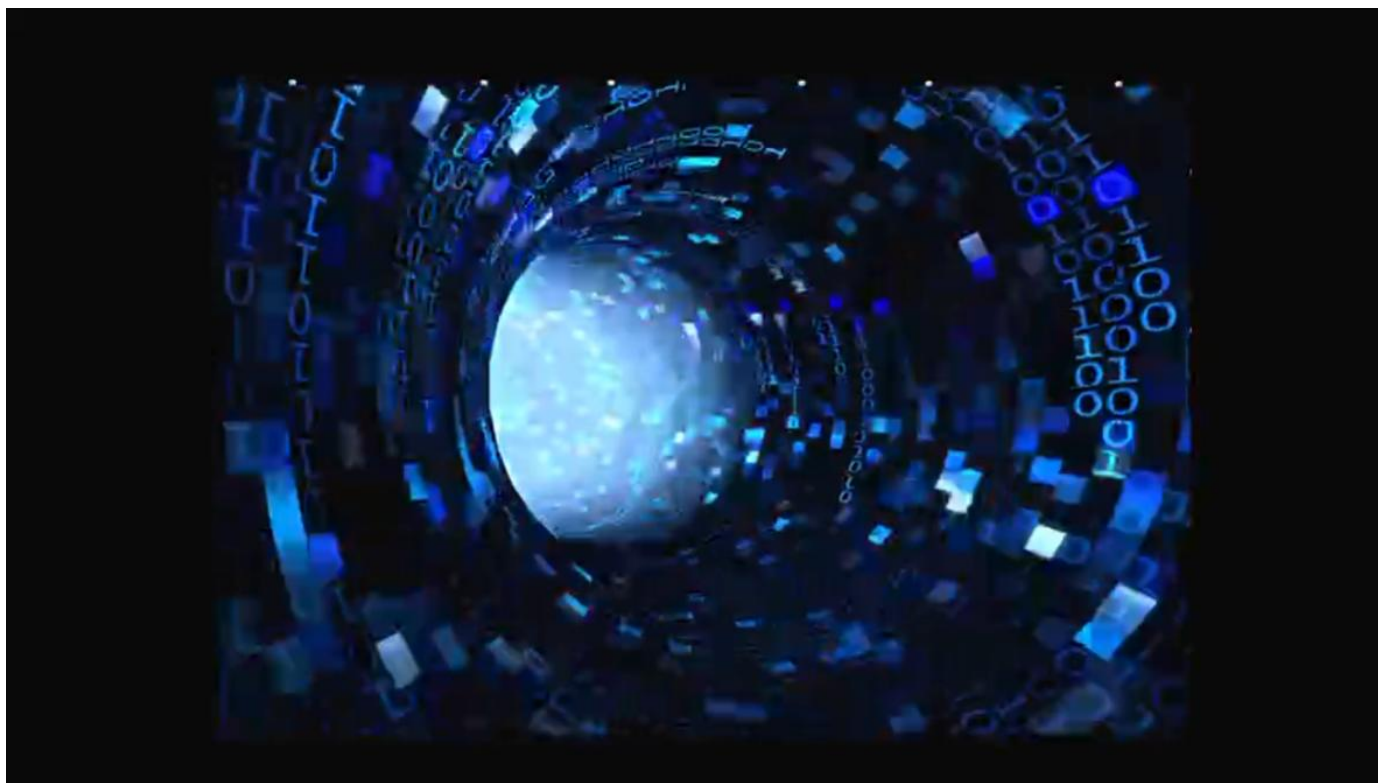
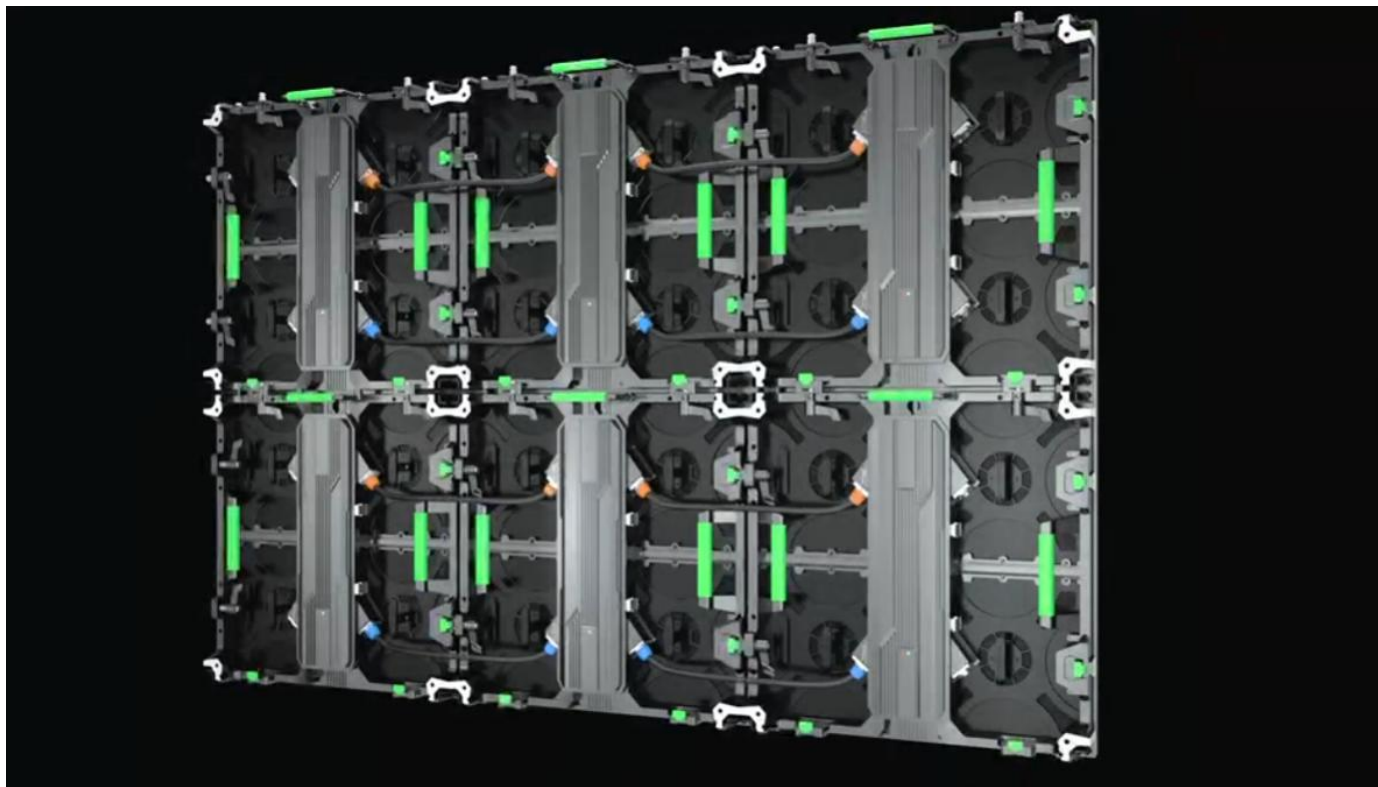


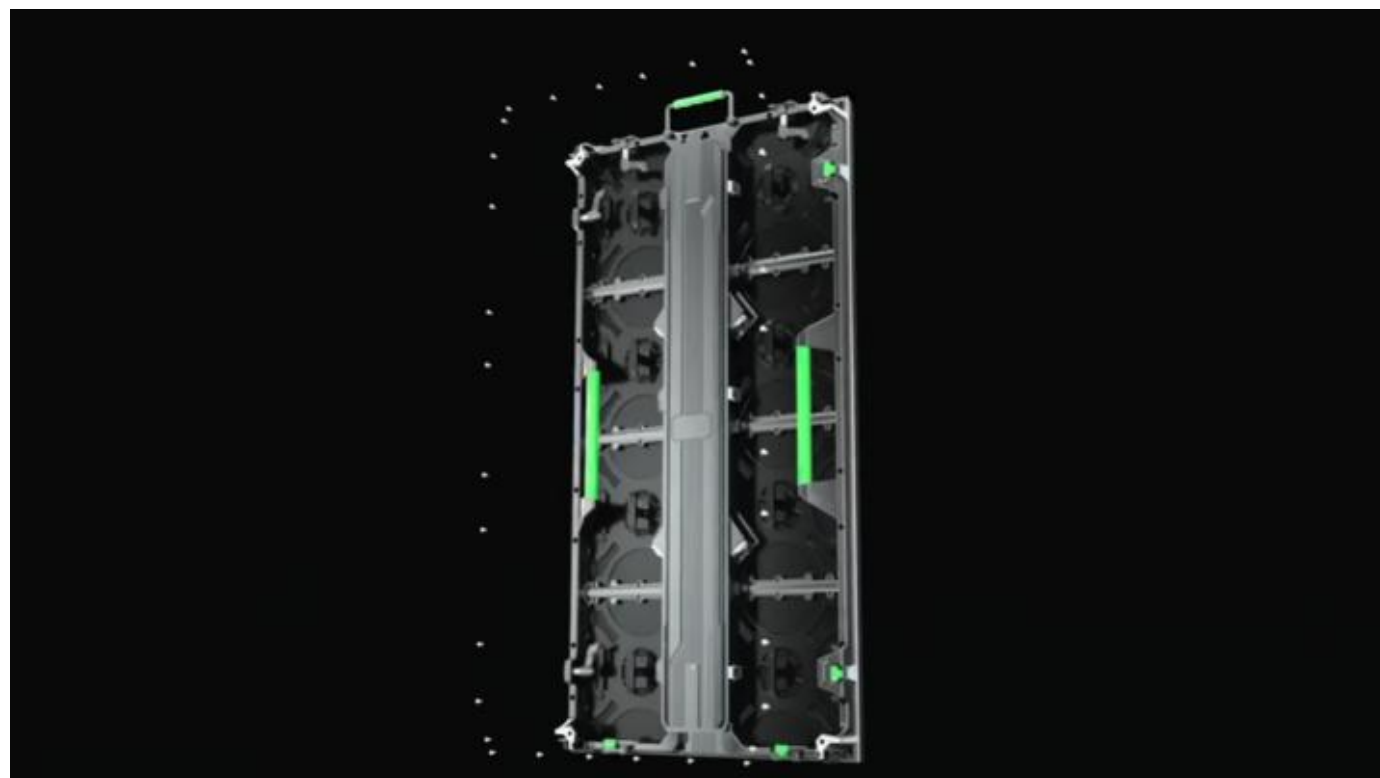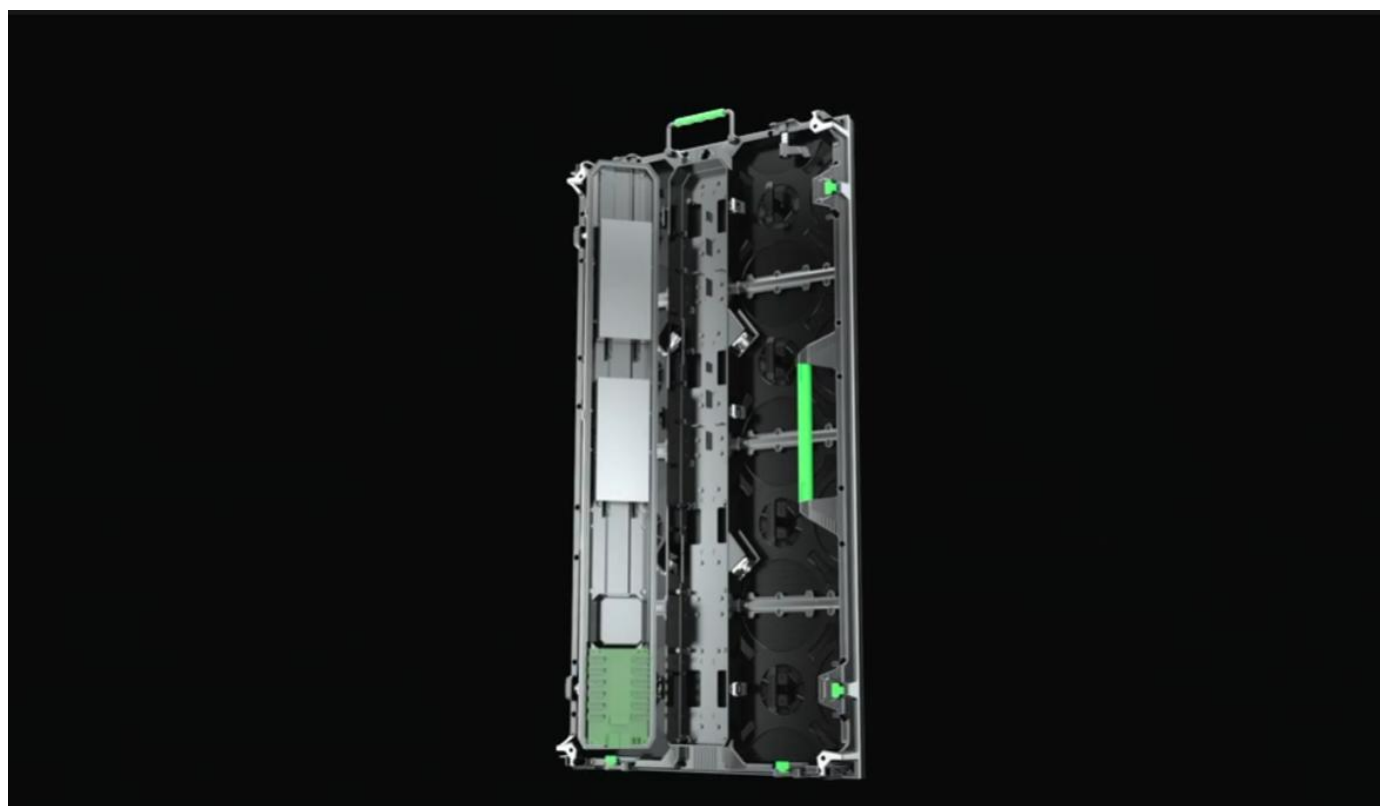

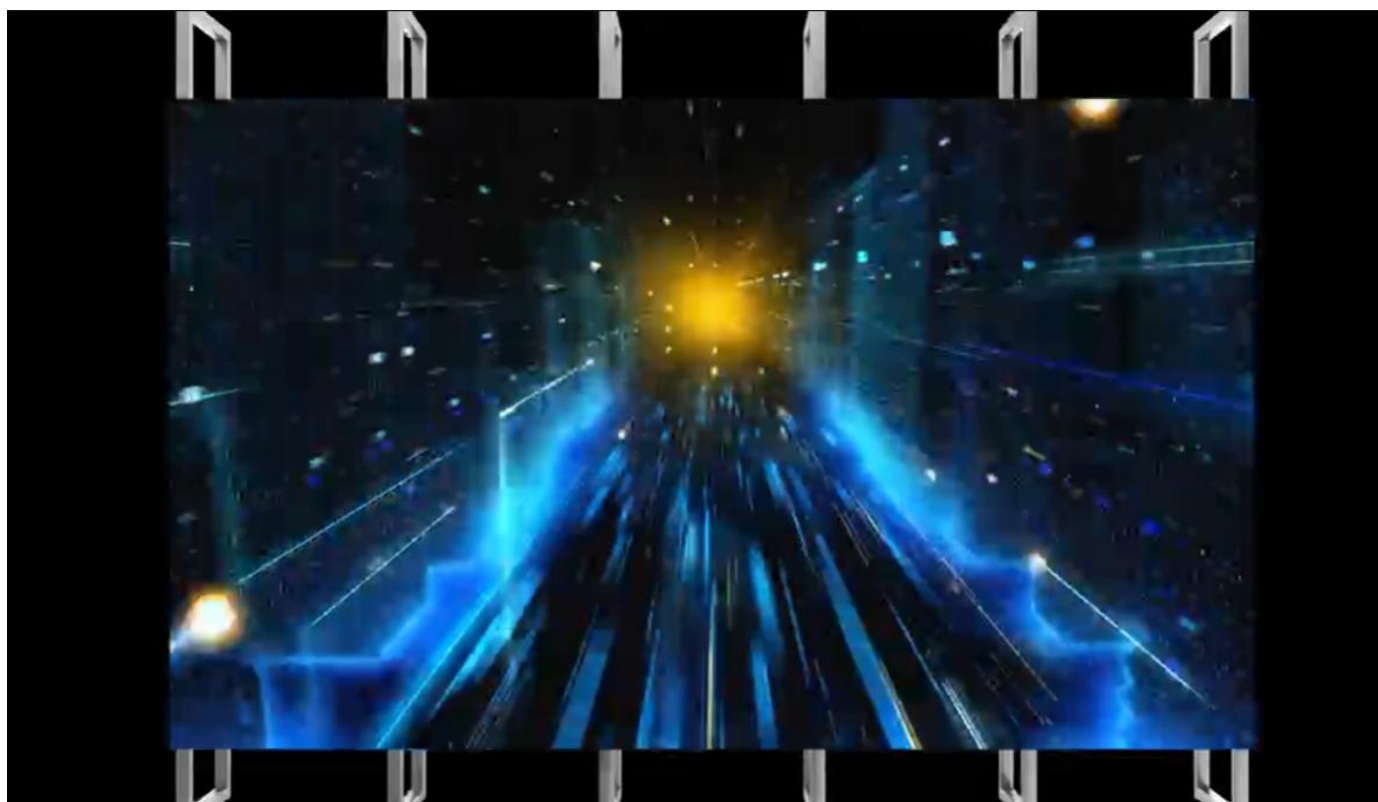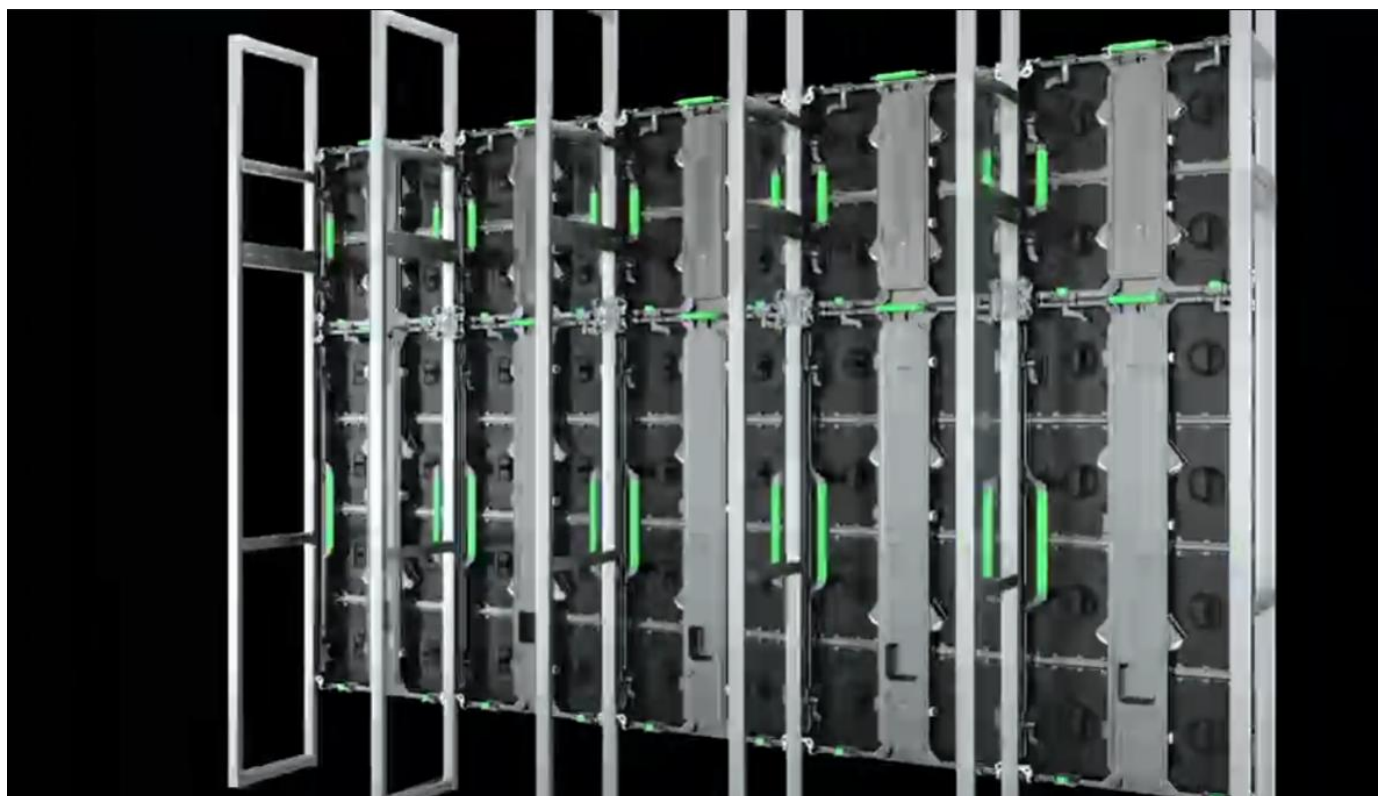

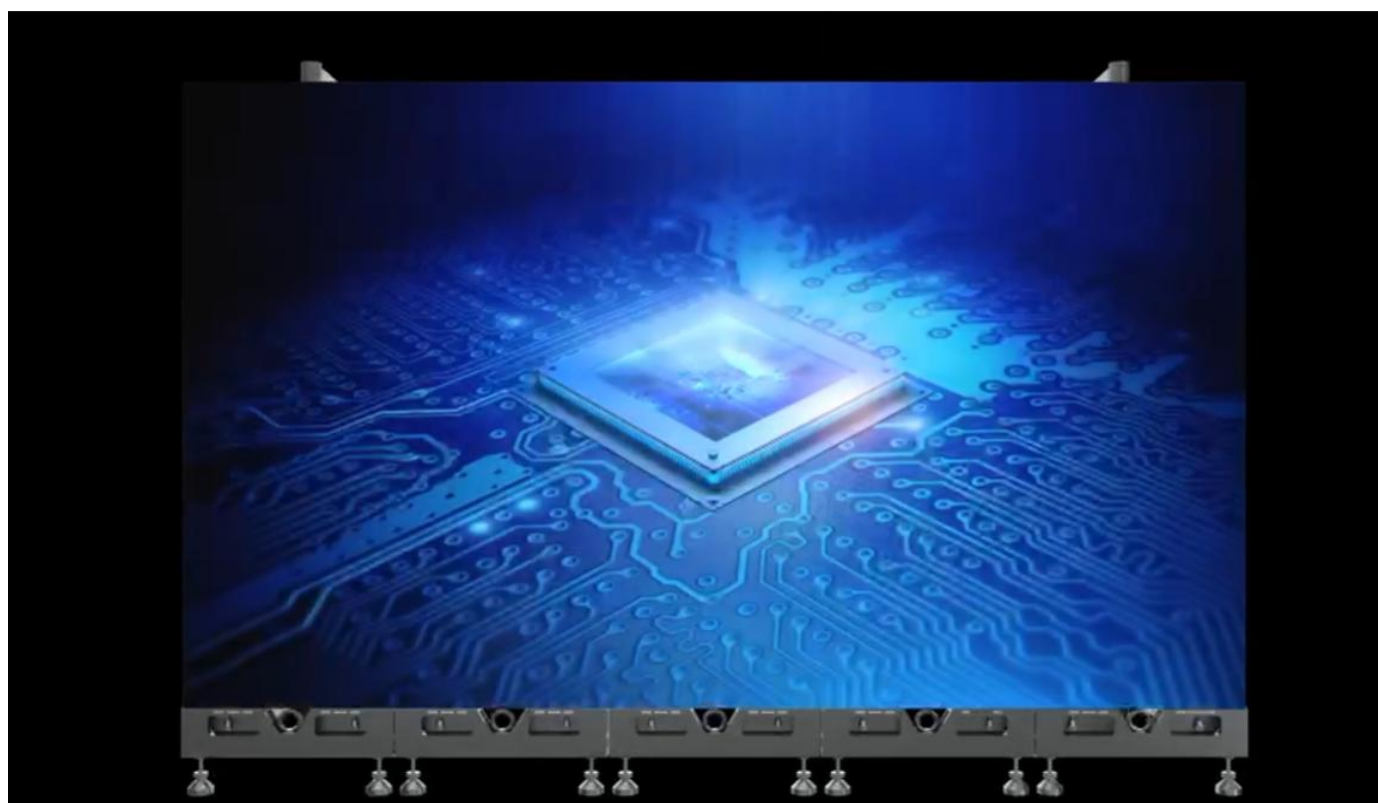

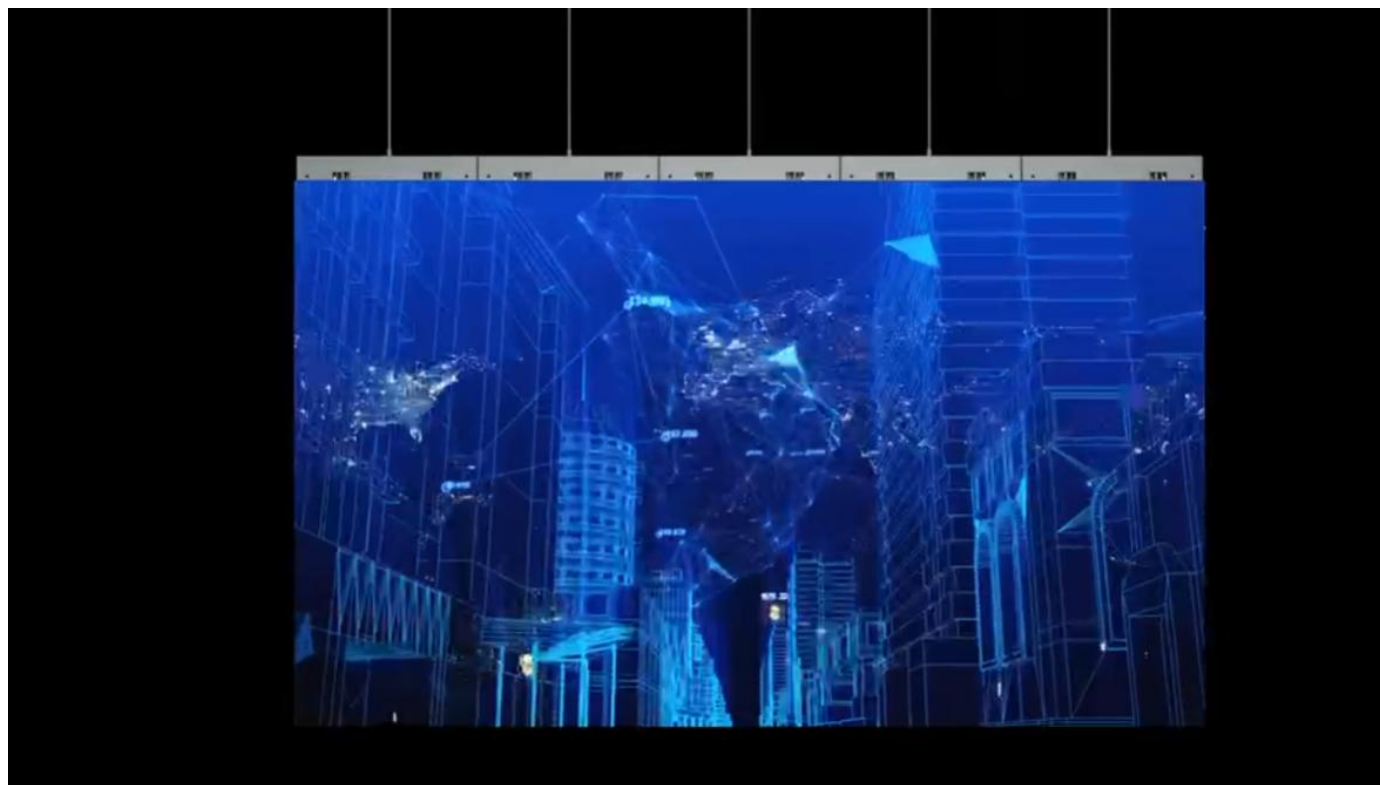

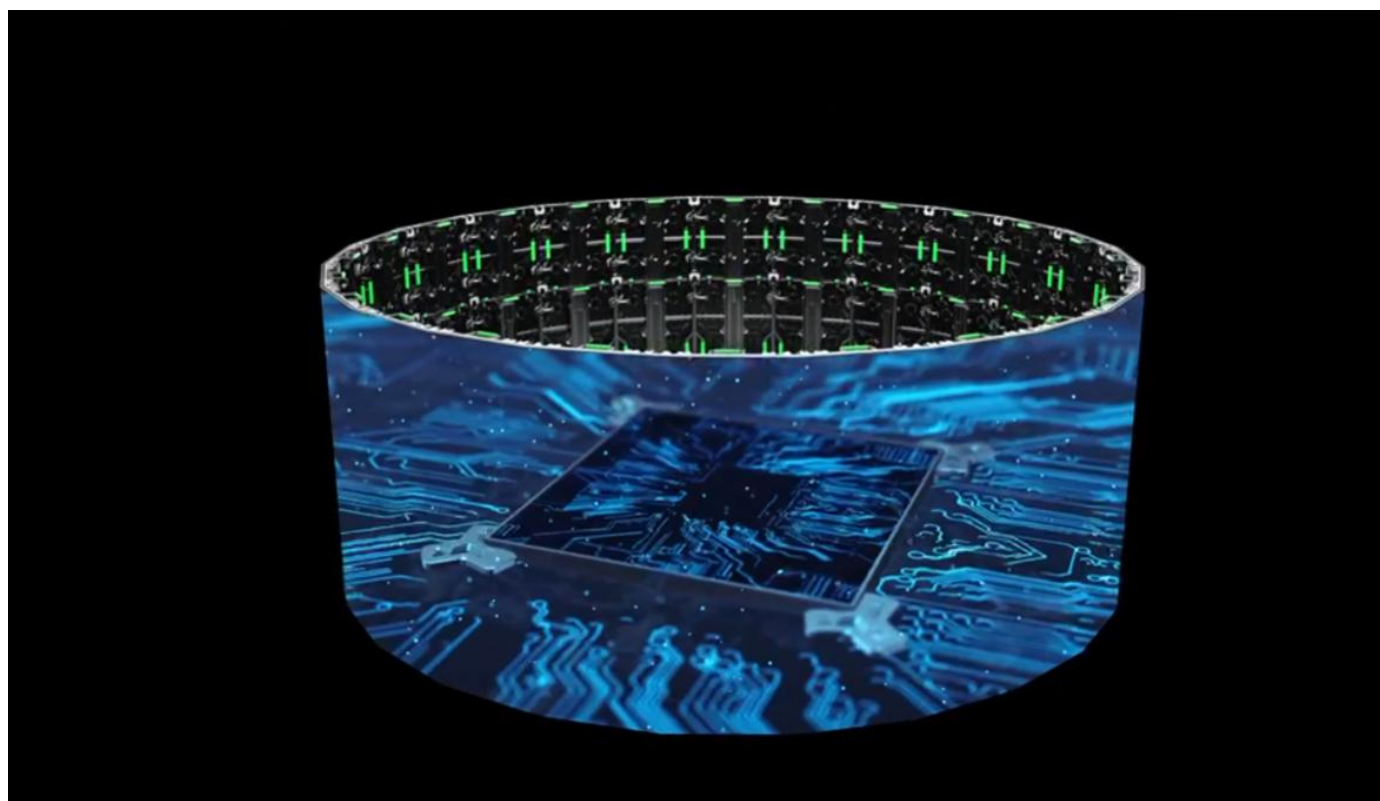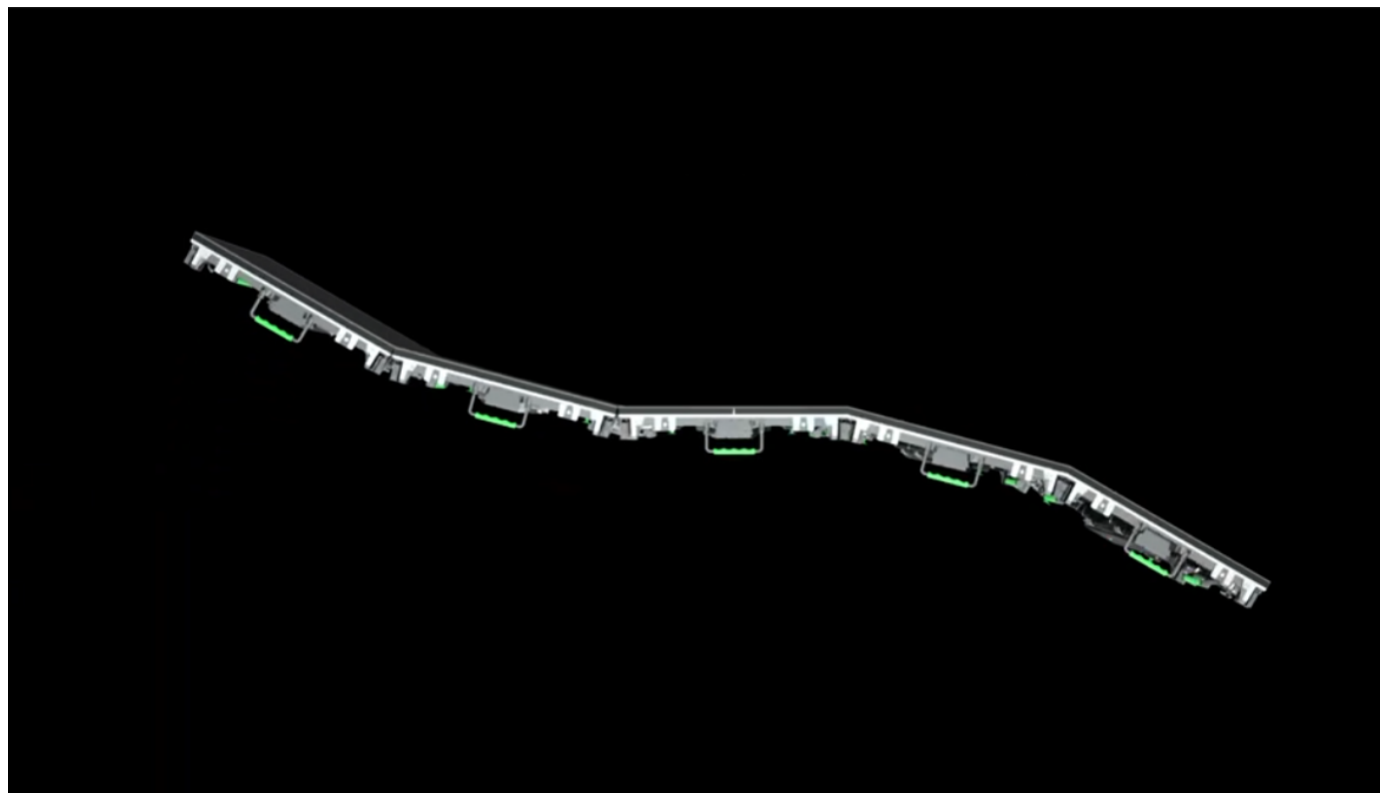

SERIE U OUTDOOR	P. 2,6	P. 2,9	P. 3,9	P. 4,8
<i>Passo</i>	2,604 mm	2,976 mm	3,91 mm	4,81 mm
<i>Modello del led</i>	SMD 1415	SMD 1415/1921	SMD 1921	SMD 1921
<i>Risoluzione modulo (pixel)</i>	96 x 96	84 x 84	64 x 64	52 x 52
<i>Driving mode</i>	1/24 scan	1/21 scan	1/16 scan	1/13 scan
<i>Pixel per modulo</i>	9,216	7,056	4,096	2,704
<i>Dimensione modulo (mm)</i>	250 x 250	250 x 250	250 x 250	250 x 250
<i>Dimensione Cabinet (mm)</i>	500 x 500/1000	500 x 500/1000	500 x 500/1000	500 x 500/1000
<i>Risoluzione Cabinet (pixel)</i>	192 x 192/384	168 x 168/336	128 x 128/256	104 x 104/208
<i>Pixel al mq</i>	147,456	112,896	65,536	43,264
<i>Distanza minima di visualizzazione</i>	≥ 2,6 m	≥ 2,9 m	≥ 3,9 m	≥ 4,8 m
<i>Luminosità</i>	5,000 Nits	5,000 Nits	5,000 Nits	5,000 Nits
<i>Protezione IP</i>	IP 65	IP 65	IP 65	IP 65
<i>Refresh rate (Hz)</i>	da 1,920 a 7,680	da 1,920 a 7,680	da 1,920 a 7,680	da 1,920 a 7,680
<i>Scala di grigi</i>	da 12 a 16 bits	da 12 a 16 bits	da 12 a 16 bits	da 12 a 16 bits
<i>Angolo visivo</i>	160°/160°	160°/160°	160°/160°	160°/160°
<i>Consumo massimo</i>	800 W/mq	800 W/mq	800 W/mq	800 W/mq
<i>Consumo medio</i>	240 W/mq	240 W/mq	240 W/mq	240 W/mq
<i>Voltaggio</i>	AC110V/AC220V	AC110V/AC220V	AC110V/AC220V	AC110V/AC220V
<i>Range operativo temperatura</i>	-10°C / 90°C	-10°C / 90°C	-10°C / 90°C	-10°C / 90°C
<i>Range operativo umidità</i>	10% / 90%	10% / 90%	10% / 90%	10% / 90%
<i>Materiale del cabinet</i>	Alluminio	Alluminio	Alluminio	Alluminio
<i>Peso cabinet 500 x 500</i>	7,5 Kg	7,5 Kg	7,5 Kg	7,5 Kg
<i>Peso cabinet 500 x 1,000</i>	14 Kg	14 Kg	14 Kg	14 Kg